

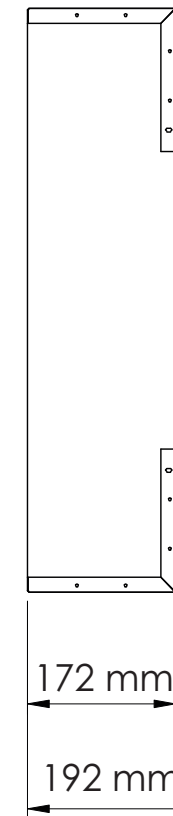
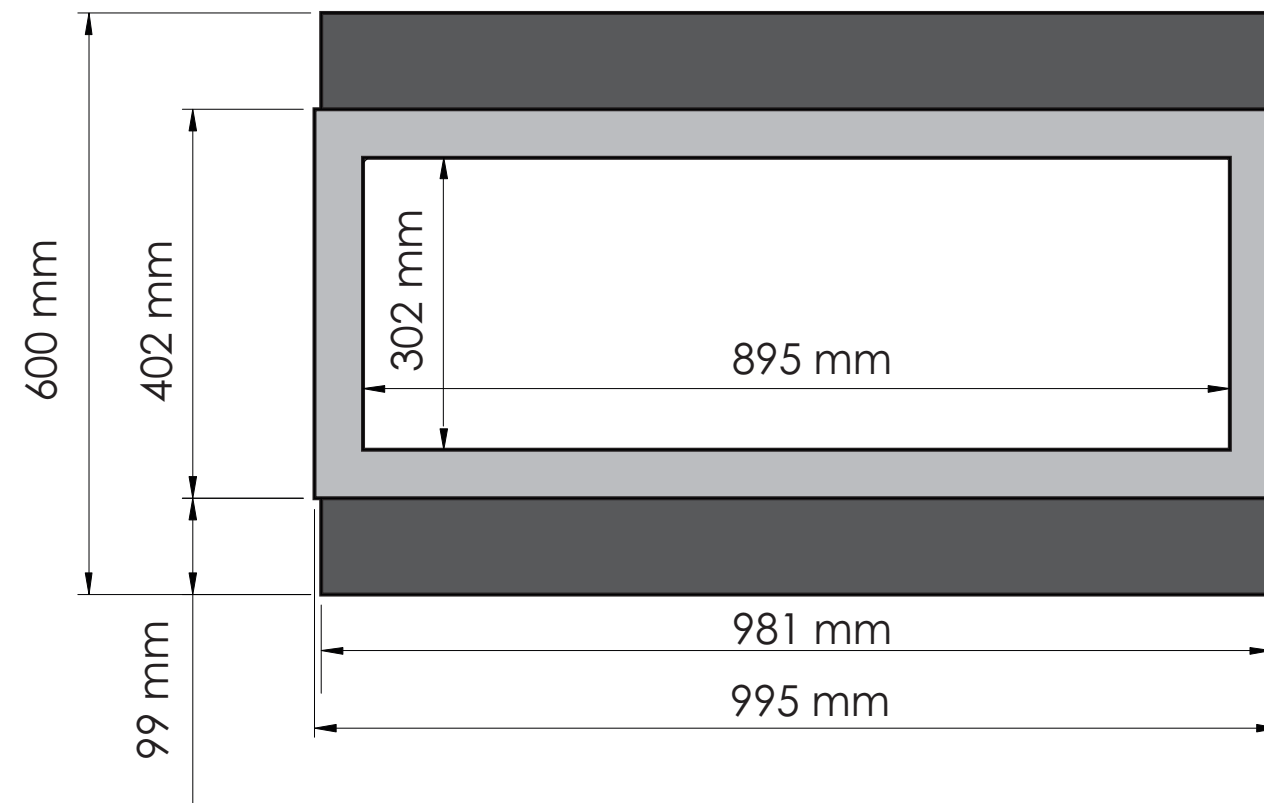


TECHNICAL SPECIFICATIONS		
VOLTS	120	
AMPS	12.5	
WATTS	1465	
HEATER	HIGH	1465 watts
	LOW	750 watts
NO HEATER	22 watts	
LAMPS	QUANTITY	LED
	WATTS	
	TOTAL WATTS	22 watts
ROTOR MOTOR	1 at 5 watts	
HEIGHT, WIDTH, DEPTH	23 5/8 x 38 5/8 x 6 3/4	
GLASS VIEWING OPENING	11 7/8 x 34 1/4	
SURROUND SIZE	15 7/8 x 39 1/8	
SHIPPING SIZE	25 1/4 x 49 3/4 x 9 3/4	
SHIPPING WEIGHT	UNIT	89 lbs
	GLASS FRONT	Included
PLUG LOCATION	Left Side	
CORD LENGTH	76"	
APPROX. HEATING AREA	400 sq ft	




SERIES BUILT IN	MODEL BI-40-SLIM		REV 1
SCALE 1" = 1'-0"	DATE: 7/1/2015		SHEET 1 OF 1



TECHNICAL SPECIFICATIONS		
VOLTS	120	
AMPS	12.5	
WATTS	1465	
HEATER	HIGH	1465 watts
	LOW	750 watts
NO HEATER	22 watts	
LAMPS	QUANTITY	LED
	WATTS	
	TOTAL WATTS	22 watts
ROTOR MOTOR	1 at 5 watts	
HEIGHT, WIDTH, DEPTH	60 x 98.1 x 17.2 cm	
GLASS VIEWING OPENING	30.2 x 56.5cm	
SURROUND SIZE	40.2 x 99.5 cm	
SHIPPING SIZE	64 x 125.9 x 24.8 cm	
SHIPPING WEIGHT	UNIT	40 kg
	GLASS FRONT	Included
PLUG LOCATION	Left Side	
CORD LENGTH	193 cm	
APPROX. HEATING AREA	37 sqm	

*Amantii*

SERIES BUILT IN	MODEL BI-40-SLIM		REV 1
SCALE 1:12	DATE: 7/1/2015		SHEET 1 OF 1