


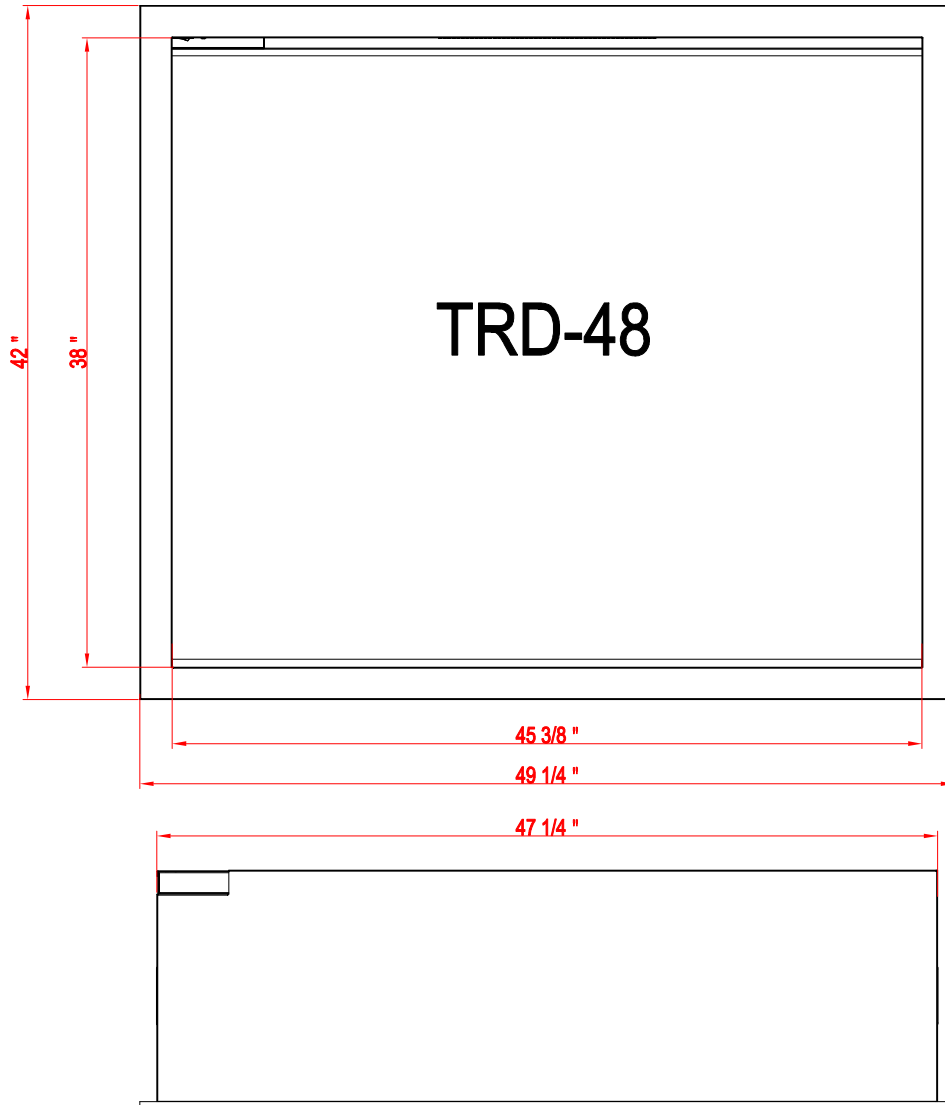
### TECHNICAL SPECIFICATIONS

VOLTS	120V	
AMPS	12.5A	
WATTS	1500W	
HEATER	HIGH	1500W watts
	LOW	750W watts
NO HEATER	50 WATTS MAX	
LAMPS	QUANTITY	231 PCS LED
	WATTS	0.5W&0.15W&0.06W
	TOTAL WATTS	47.2 W
ROTOR MOTOR	1 at 2.9 watts	
HEIGHT.WIDTH.DEPTH	106.7 X 125.2 X 36.5 cm	
GLASS VIEWING OPENING	115.2 X 96.7 cm	
FRAMING SIZE	104.7 X 122.5 X 36.5 cm	
SHIPPING SIZE	123.8 X 146 X 49.6 cm	
SHIPPING WEIGHT	85 Kgs	
GLASS FRONT	UNIT	1
	GLASS FRONT	Included
PLUG LOCATION	Left Side	
CORD LENGTH	70.9 < L	
APPROX.HEATING AREA	400 SQ FT	



SERIES TRD	MODEL TRD-48 BESPOKE		REV 1
SCALE 1"=1'-0"	DATE:22/02/2023		SHEET 1 OF 1

TRD-48



**TECHNICAL SPECIFICATIONS**

VOLTS	120V	
AMPS	12.5A	
WATTS	1500W	
HEATER	HIGH	1500W watts
	LOW	750W watts
NO HEATER	50 WATTS MAX	
LAMPS	QUANTITY	231 PCS LED
	WATTS	0.5W&0.15W&0.06W
	TOTAL WATTS	47.2 W
ROTOR MOTOR	1 at 2.9 watts	
HEIGHT.WIDTH.DEPTH	42 " X 49 1/4 " X 14 3/8 "	
GLASS VIEWING OPENING	45 3/8 " X 38 "	
FRAMING SIZE	41 1/4 " X 48 1/4 " X 14 3/8 "	
SHIPPING SIZE	48 3/4 " X 57 1/2 " X 19 1/2 "	
SHIPPING WEIGHT	187 LBS	
UNIT	1	
GLASS FRONT	Included	
PLUG LOCATION	Left Side	
CORD LENGTH	70.9 < L	
APPROX.HEATING AREA	400 SQ FT	



SERIES TRD	MODEL TRD-48 BESPOKE		REV 1
SCALE 1"=1'-0"	DATE:21/02/2023		SHEET 1 OF 1