

TECHNICAL SPECIFICATIONS

VOLTS	120V	
AMPS	12.5A	
WATTS	1500W	
HEATER	HIGH	1500W watts
	LOW	750W watts
NO HEATER	45.2 WATTS MAX	
LAMPS	QUANTITY	150 PCS LED
	WATTS	0.5W&0.15W&0.06W
	TOTAL WATTS	31.4 W
ROTOR MOTOR	3 at 8.7 watts	
HEIGHT.WIDTH.DEPTH	74.6 X 117.3 X 38.2 cm	
GLASS VIEWING OPENING	114.3 X 50.9 cm	
SHIPPING SIZE	88 X 131 X 48 cm	
SHIPPING WEIGHT	70.7 Kgs	
UNIT	1	
GLASS FRONT	Included	
PLUG LOCATION	Left Side	
CORD LENGTH	70.9 < L	
APPROX.HEATING AREA	400 SQ FT	

SERIES
TRV-BESPOKE

MODEL
TRV-45 BESPOKE





REV
1

SCALE 1"=1'-0"

DATE:11/26/2022

SHEET 1 OF 1

TECHNICAL SPECIFICATIONS

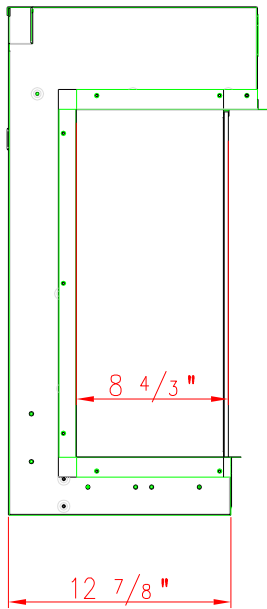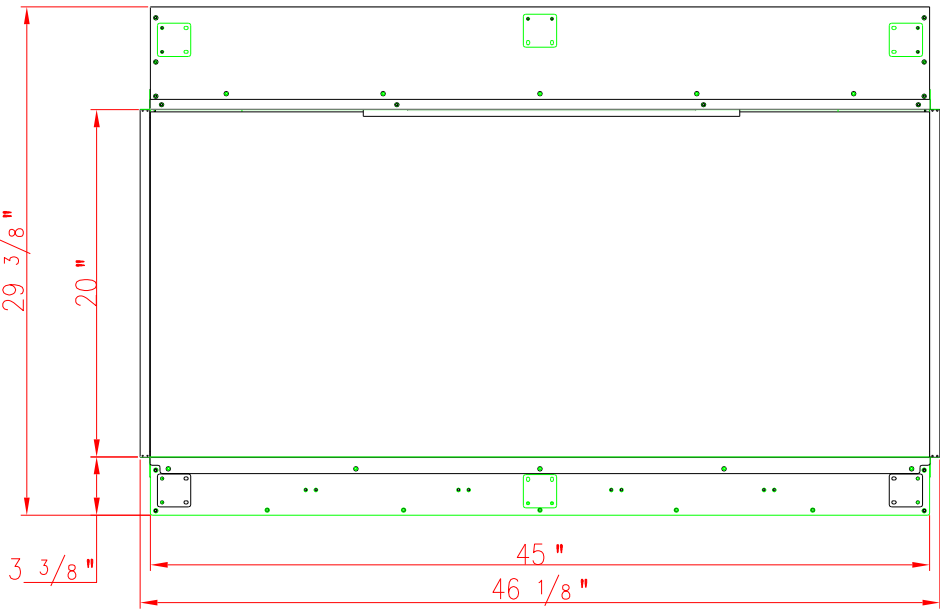

VOLTS	120V	
AMPS	12.5A	
WATTS	1500W	
HEATER	HIGH	1500W watts
	LOW	750W watts
NO HEATER	45.2 WATTS MAX	
LAMPS	QUANTITY	150 PCS LED
	WATTS	0.5W&0.15W&0.06W
	TOTAL WATTS	31.4 W
ROTOR MOTOR	3 at 8.7 watts	
HEIGHT.WIDTH.DEPTH	29 3/8 " X 46 1/8 " X 15 "	
GLASS VIEWING OPENING	45 " X 20 "	
SHIPPING SIZE	34 5/8 " X 51 5/8 " X 18 7/8 "	
SHIPPING WEIGHT	155.5 LBS	
UNIT	1	
GLASS FRONT	Included	
PLUG LOCATION	Left Side	
CORD LENGTH	70.9 < L	
APPROX.HEATING AREA	400 SQ FT	



SERIES TRV-BESPOKE	MODEL TRV-45 BESPOKE		REV 1
SCALE 1"=1'-0"	DATE:11/26/2022		SHEET 1 OF 1